




UT15B PRO/UT17B PRO NEW

1000V True RMS Digital Multimeter

UT15B PRO/UT17B PRO are highly reliable, safe and durable true RMS multimeters with CAT III 1000V/CAT IV 600V ratings. Equipped with built-in VFC, it can filter interference, resulting in a more accurate voltage reading. These meters come with gold plated test leads for quick and accurate measurement. UT15B PRO/UT17B PRO also provide full range 1000V protection, as well as 8kV transient voltage protection, which can withstand sudden high voltage shocks.

- VFC
- Auto range
- Relative mode
- Flashlight
- True RMS
- Continuity test
- Diode test
- Max/Min
- Data hold
- Low battery indication
- Auto backlight
- Auto power off

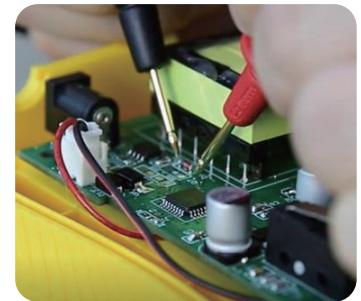

Gold plated test leads

	Range	UT15B PRO	UT17B PRO
Certificates	CE, RoHS, cETLus		
DC voltage (V)	1000V	±(0.5%+3)	±(0.5%+3)
AC voltage (V)	1000V	±(1%+3)	±(1%+3)
AC current (A)	10A	±(1%+3)	±(1%+3)
DC current (A)	10A	±(0.8%+3)	±(0.8%+3)
Resistance (Ω)	60MΩ	±(0.5%+2)	±(0.5%+2)
Capacitance (F)	6000μF	±(2%+5)	±(2%+5)
Frequency (Hz)	10Hz~100kHz		±(0.1%+3)
Duty cycle	1%~99%		±(1%+4)
Temperature (°C/°F)	-55°C~500°C/-67°F~932°F		±(2%+1)
Display count		6000	6000
AC frequency response		40~500Hz	40~500Hz
Category ratings	CAT III 1000V, CAT IV 600V		
Power	1.5V battery (LR6) x 2		
Product net weight	UT15B PRO: 484g; UT17B PRO: 484g		
Product size	195mm x 95mm x 58mm		
Standard accessories	English manual, test lead, temperature probe (UT17B PRO)		
Standard individual packing	Gift box, cloth bag		
Standard quantity per carton	10pcs		
Standard carton measurement	505mm x 355mm x 205mm		
Standard carton gross weight	UT15B PRO: 8.8kg; UT17B PRO: 9.1kg		